

# Installation guide

## Swivel seat bracket (co-driver)

-

VW

T5 / T6 / T6.1


**\*Attention:**

The swivel seat bracket can only be used at the co-driver's seat without significant change within crucial parts of the van.

For a swivelling driver's seat, please consult your car dealer. The passenger seat should not be electrically adjustable.



Pull the key in order to avoid trouble codes after un- and re-plugging the seat electrics.

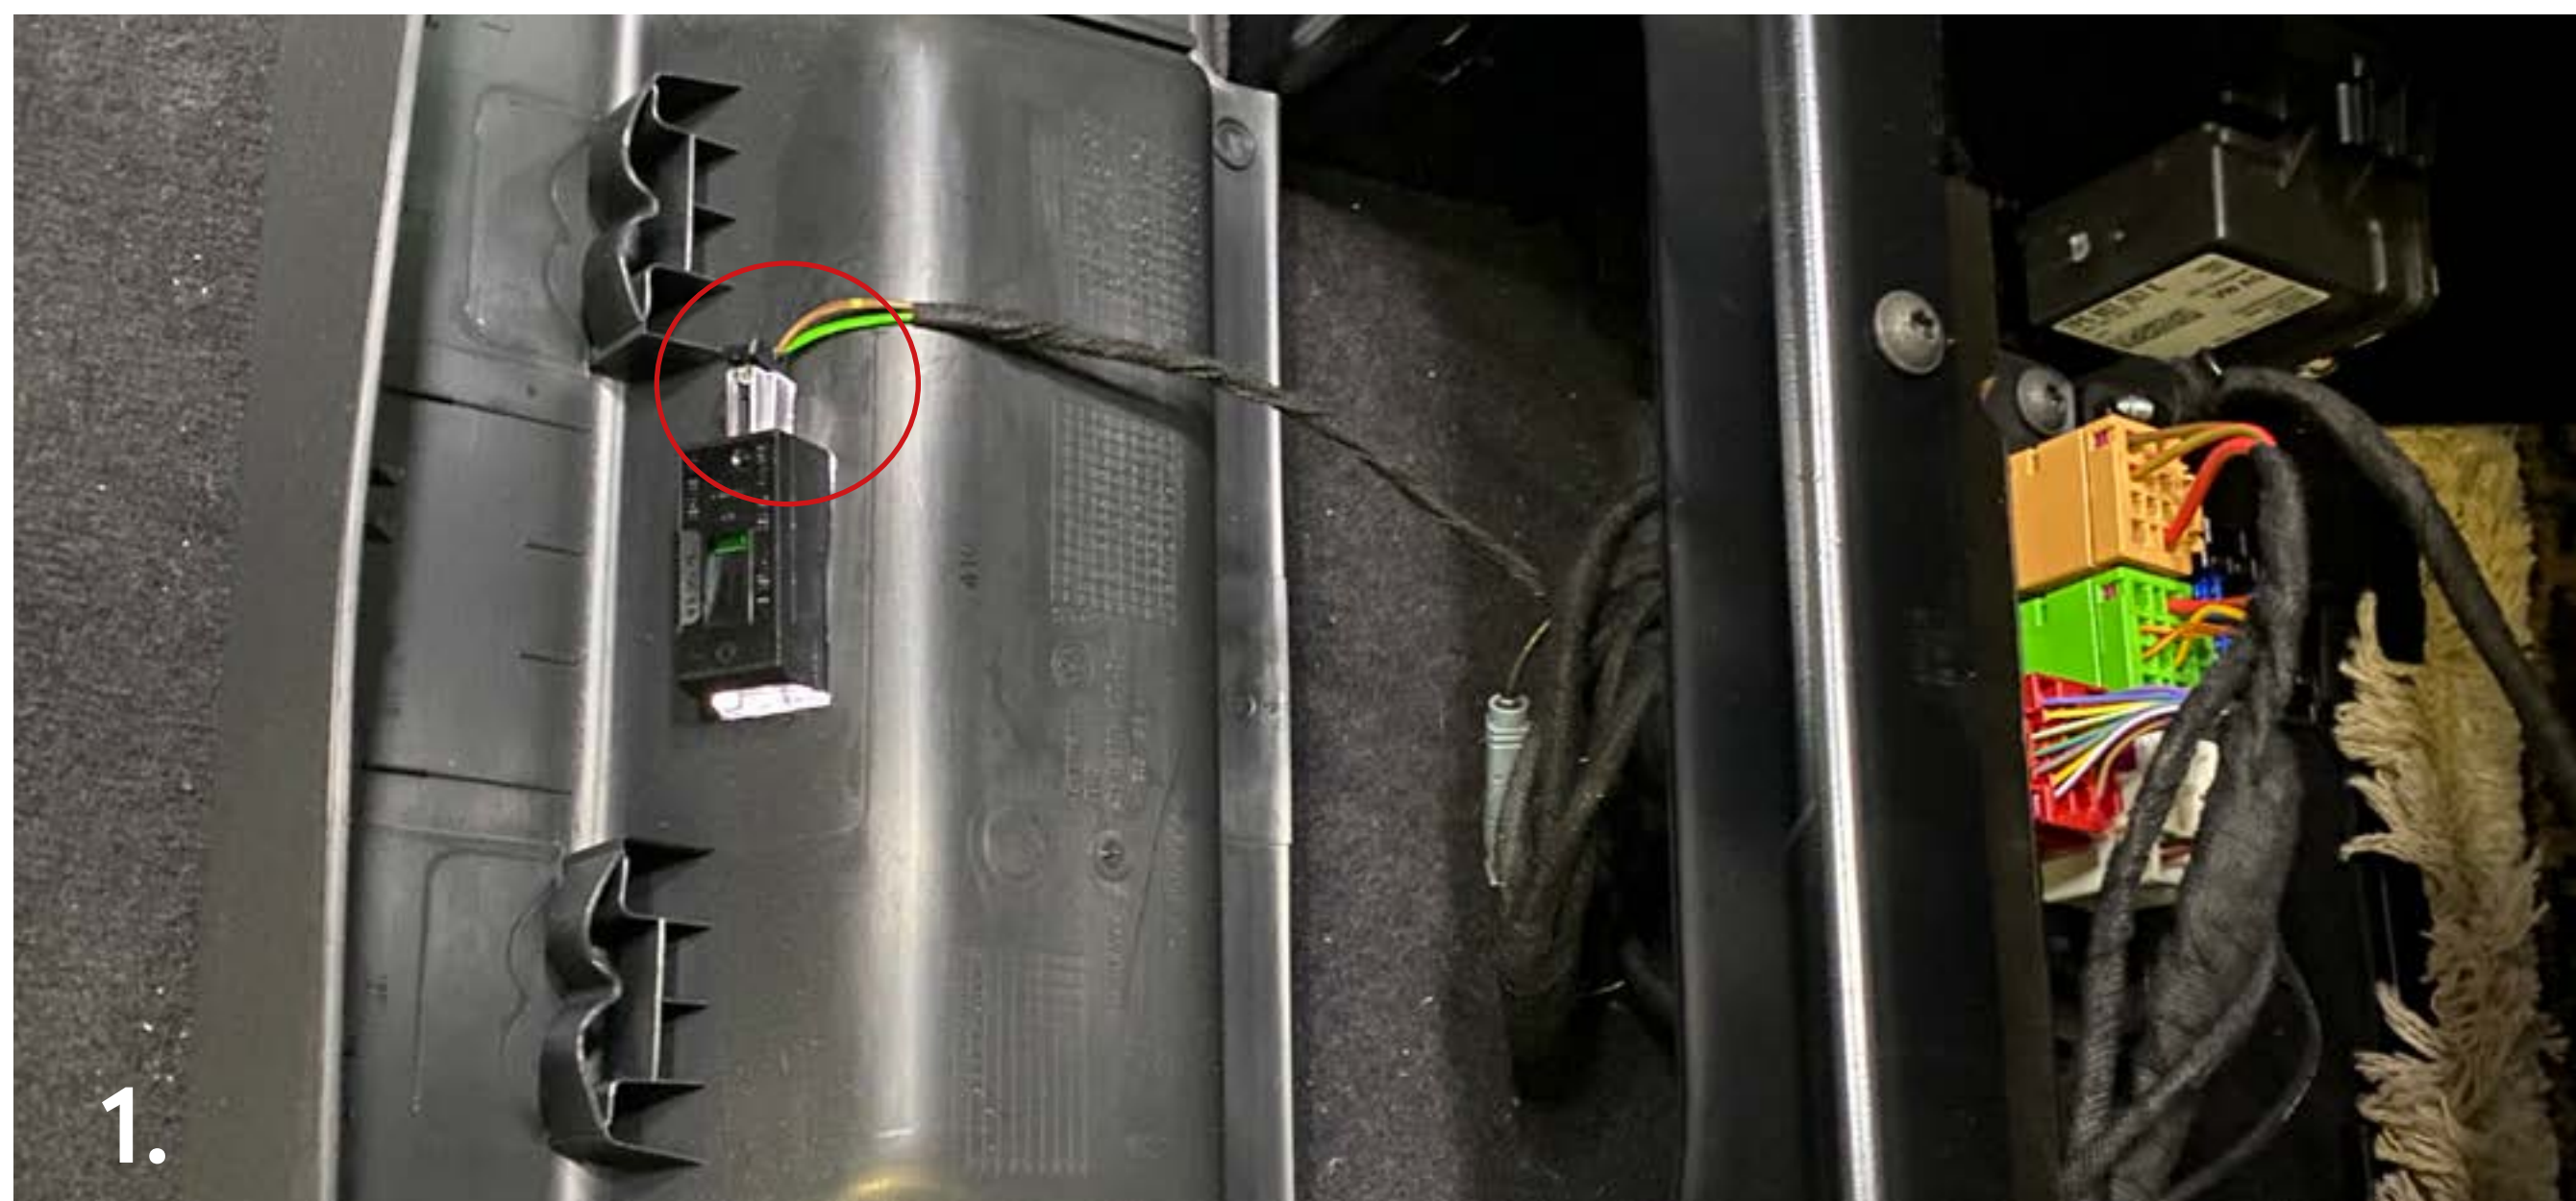

Take down the cap on the passenger seat at the back.

Note:

*On the T6.1, the interior lighting must be unplugged at the cap (pic. 1 + 2).*





3.

Move the co-driver's seat completely to the back and unscrew the front screws (pic. 3).



4.



5.

Move the co-driver's seat completely to the front and unscrew the aft screws (pic. 4 + 5).





Carefully tilt the seat over to the back while watching out for the seat's electric cables. Do not remove the seat completely (pic. 6).

Tip:  
*It is best to have a second person hold the seat while tilting it back.*





Unplug all cables and memorise where they were plugged in (pic. 7).


Tip:

*You can take a picture of the cables.*








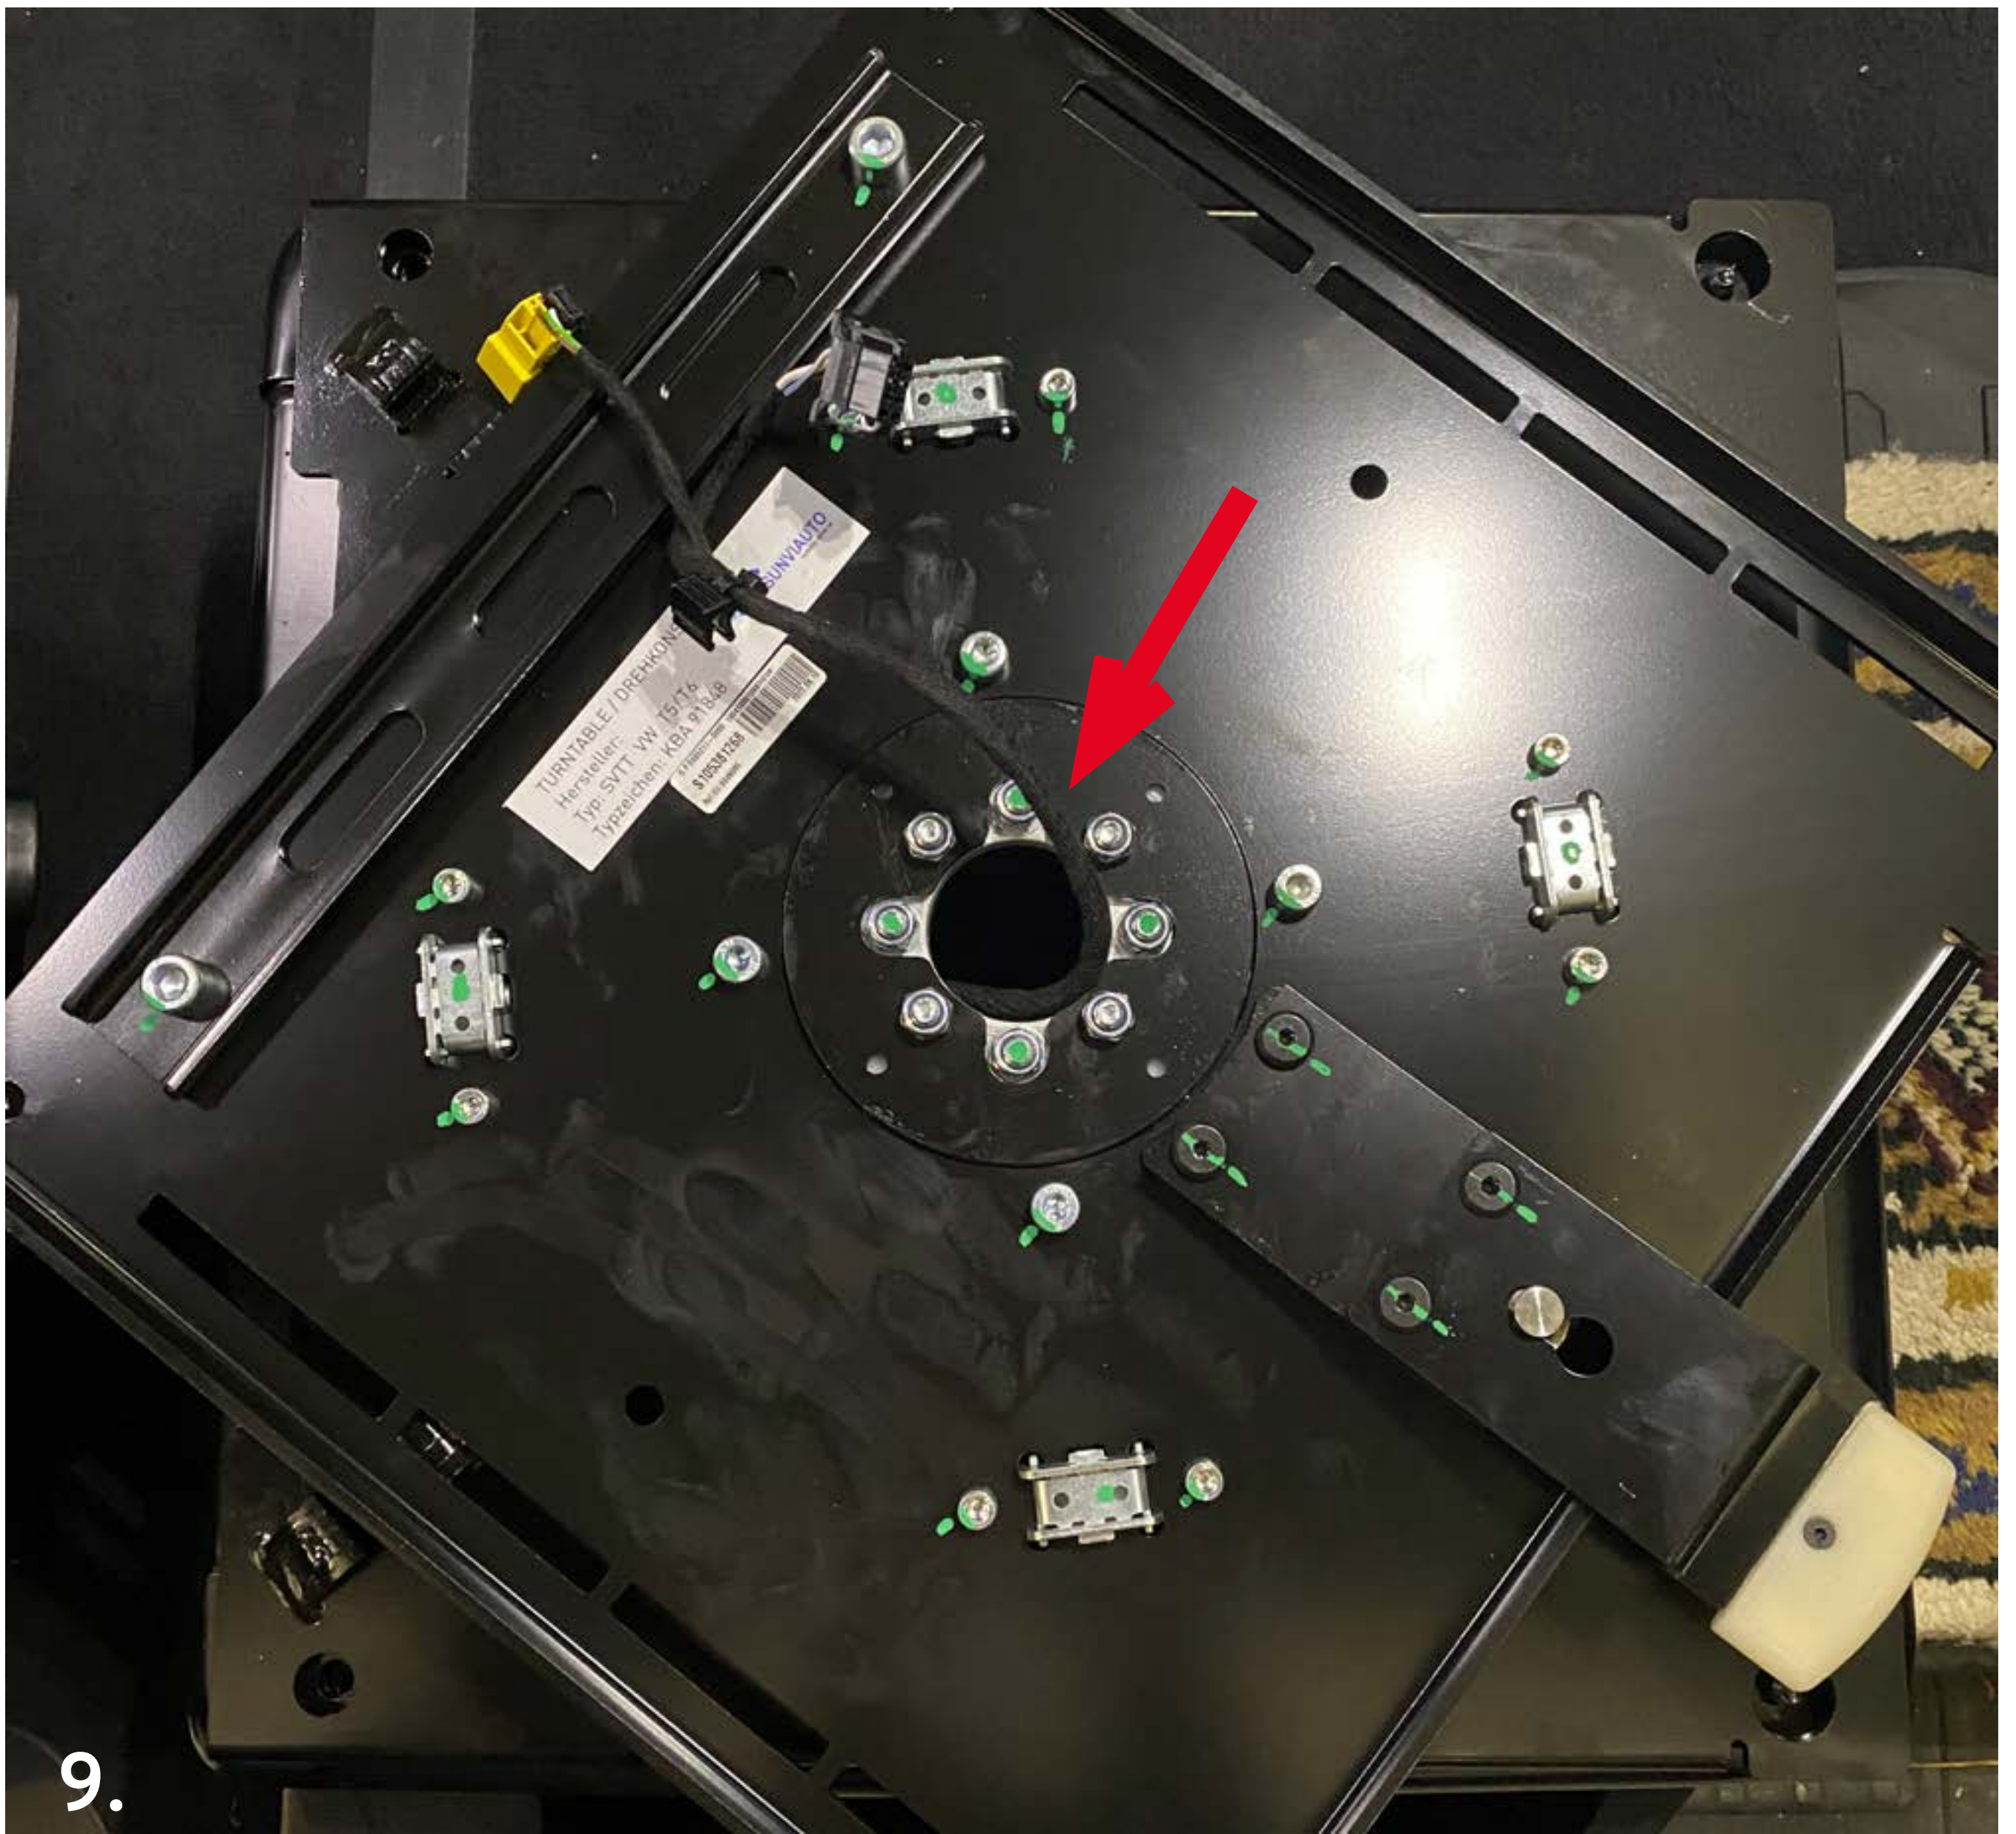

Place the swivel bracket on the seat mount and thread the cables through the hole in the center of the swivel bracket (pic. 9). Then rotate the top plate a little bit to get better access to the screws.

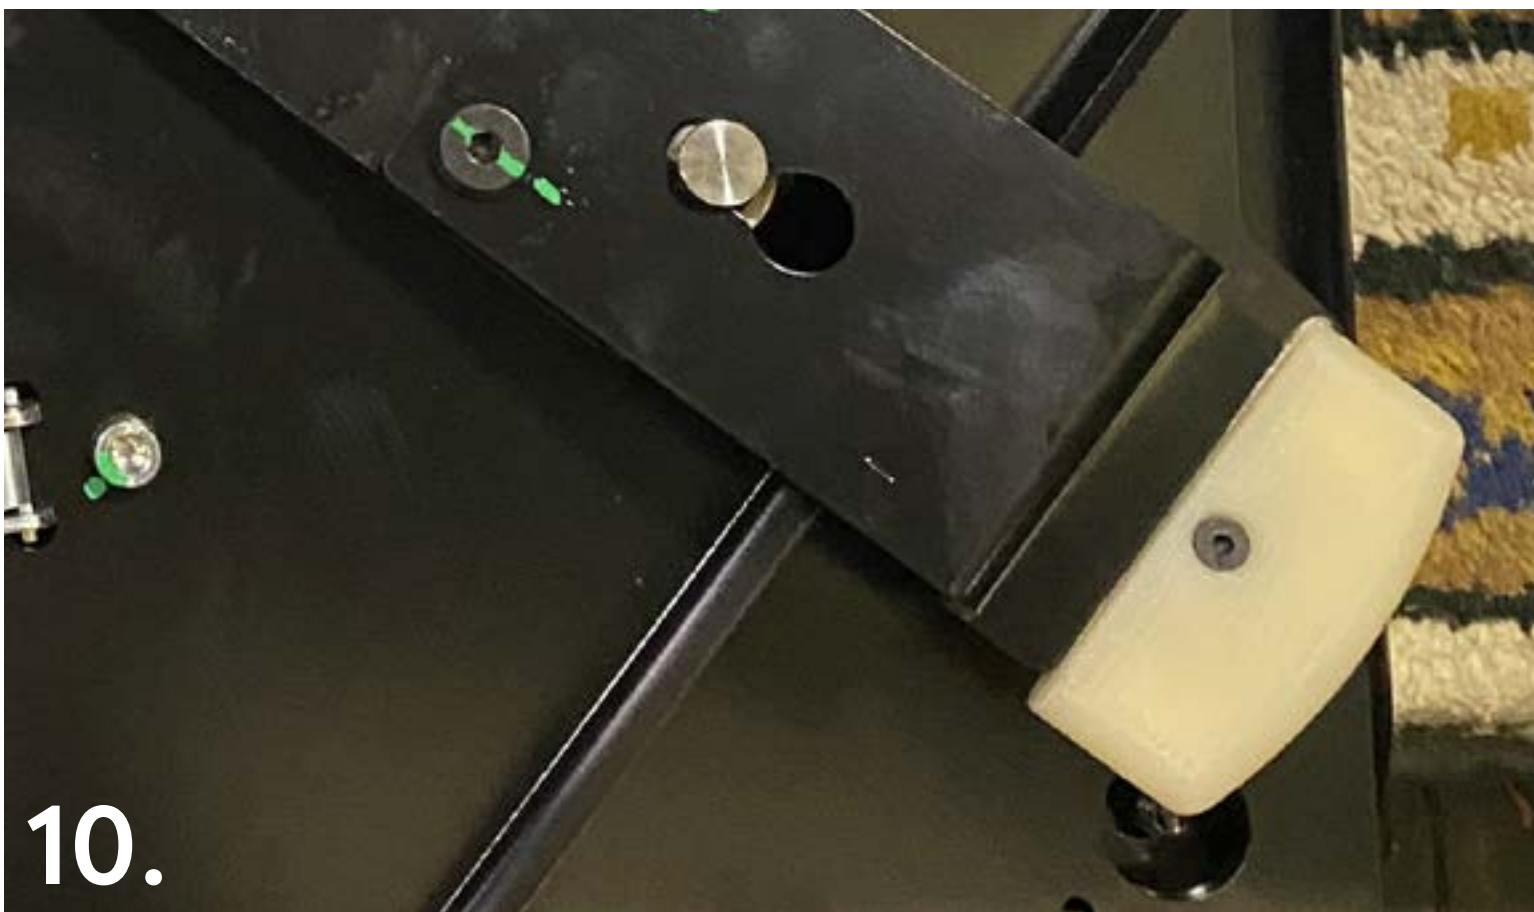

Note:

*To rotate the upper plate, pull the white lever upwards (pic. 10).*





Fasten the swivel bracket on the seat bracket with the screws sent along and twist the upper plate back (pic. 11 + 12).

Tip:  
*Tighten the screws only slightly at first until all four have bitten.*







Place the seat on the swivel seat bracket.  
Do not place it completely on the seat bracket yet, but first plug the cables back in at the right place (pic. 13 + 14).







16.

Mount the seat with the enclosed screws and one lining disk each (pic. 15 + 16).

Tip:

*If you turn the swivel bracket and seat a little, it will be easier to install the screws.*



17.

If you still want to use the original back cover of the seat pan, cut off the part right of the red line (pic. 17).





Move the seat completely to the rear and pump it a little up to avoid harm to the seat's plastic linings (pic. 18).

Note:

*When turning the seat, make sure that you always turn it back in the opposite direction to the direction in which you turned the seat (do not turn it in a circle).*

*Otherwise, the cables may pull off at the bottom.*





19.

Pull the iron lever up and turn the seat counterclockwise.

Watch out for the sun visor or an extended cup holder not to be in the way of the seat (pic. 19).

Note:

*Due to security reasons the swivel seat bracket does not engage in turned position.*

*Twist it back until catching every time before driving.*

If you have any further questions please contact us:  
+49 (0) 8063 / 20 760 - 0 oder [info@vanessa-mobilcamping.de](mailto:info@vanessa-mobilcamping.de)

VanEssa mobilcamping | Lauser Strasse 27 | 83620 Grosshöhenrain | Deutschland  
Tel. +49 (0) 8063/20 760-0 | [info@vanessa-mobilcamping.de](mailto:info@vanessa-mobilcamping.de)